


## Carbide corner-radius endmill

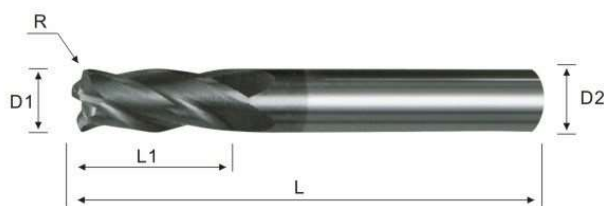

1. 超细微粒合金棒材，耐磨性强；
2. 用于用于HRC50度以下钢材加工；
3. 也可用于不锈钢、铸铁等材料加工。
4. TiAlN纳米涂层。
  1. Ultrafine particle alloy bar and high wear resistance;
  2. Suitable for machining of steel below HRC50 degrees;
  3. Also suitable for machining of stainless steel and cast iron and so on.
  4. TiAlN nano-coating.

### 技术参数(Technical parameters):

MODEL	直径D1 Flute Diameter	R角R R angle	刃长L1 Flute Length	全长L Full length	柄径D2 Shank diameter
1R0.2*4*2*50	1	R0.2	2	50	4
2R0.2*4*4*50	2	R0.2	4	50	4
3R0.2*4*6*50	3	R0.2	6	50	4
3R0.5*4*6*50	3	R0.5	6	50	4
4R0.2*4*8*50	4	R0.2	8	50	4
4R0.5*4*8*50	4	R0.5	8	50	4
4R1*4*8*50	4	R1	8	50	4
6R0.5*6*12*50	6	R0.5	12	50	6
6R1*6*12*50	6	R1	12	50	6
8R0.5*8*16*60	8	R0.5	16	60	8
8R1*8*16*60	8	R1	16	60	8
10R0.5*10*20*75	10	R0.5	20	75	10
10R1*10*20*75	10	R1	20	75	10
12R0.5*12*24*75	12	R0.5	24	75	12
12R1*12*24*75	12	R1	24	75	12
12R2*12*24*75	12	R2	24	75	12
4R0.2*6*8*75	4	R0.2	8	75	6
4R0.5*6*8*75	4	R0.5	8	75	6
6R0.5*6*12*100	6	R0.5	12	100	6
6R1*6*12*100	6	R1	12	100	6
8R0.5*8*16*100	8	R0.5	16	100	8
8R1*8*16*100	8	R1	16	100	8
10R0.5*10*20*100	10	R0.5	20	100	10
10R1*10*20*100	10	R1	20	100	10
12R0.5*12*24*100	12	R0.5	24	100	12
12R1*12*24*100	12	R1	24	100	12
12R2*12*24*100	12	R2	24	100	12

