


### LBK 整體鎢鋼鏜刀杆

LBK Solid Tungsten Carbide Boring Bar

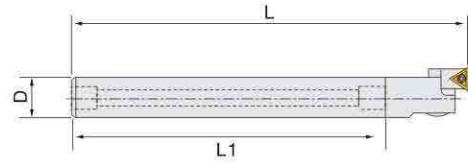

型號 Model	尺寸 Size(mm)			組合鏜頭 Modular Boring	单价 RMB
	D	L <sub>1</sub>	L		
LBK C19-LBK1-150	19	150	182.5	CBH20-36	1700
C19-LBK1-200	19	200	232.5		1875
C19-LBK1-250	19	250	282.5		2325
C19-LBK1-300	19	300	332.5		2875
<i>New!</i> C24-LBK2-150	24	150	185.5	CBH25-47	2300
C24-LBK2-200	24	200	235.5		2625
C24-LBK2-250	24	250	285.5		3188
C24-LBK2-300	24	300	335.5		3750
<i>New!</i> C24-LBK2-350	24	350	385.5	CBH32-60	4980
C32-LBK3-200	32	200	240		4400
C32-LBK3-250	32	250	290		5008
C32-LBK3-300	32	300	340		5900
C32-LBK3-350	32	350	400	7700	
C32-LBK3-400	32	400	450	8800	

#### 特點/Feature

- 超硬碳化鎢制鏜刀杆，使用高韌性配方製造，堅韌耐用，實現高硬度、高剛性、高抗震性，可施行超深孔加工(10D)。
- 各種規格均有內部水孔，深孔加工時排屑及冷卻效果良好。
- 直柄結構，加工深度可依加工須求自行調整。
- Super hard tungsten carbide boring bar made from high toughness compound is tough and durable, highly materializing features of super hardness, high rigidity and extra vibration resistance, most suitable for extra depth boring(10D).
- Standard internal coolant hole is built in every size of the bar, best for cooling and chip evacuation in deep hple boring.
- Featuring straight shank stucture, the bar canbe adjusted to different working lengths.

### TWE 螺紋雙刃粗鏜頭

Double blade coarse boring head for TWE thread



型號 Model	范围 Range	L	刀片型號 Insert
TWE14-17-M8	14-17	20	CCMT060204
TWE16-21-M8	16-21	28	CCMT060204
TWE19-26-M10	19-26	35	CCMT060204
TWE25-33-M12	25-33	35	CCMT060204
TWE32-42-M16	32-42	45	CCMT09T304
TWE40-55-M16	40-55	45	CCMT09T304

注：更大孔径可私人定制。 Note: larger aperture can be customized.