

IP67 防水数显卡尺

Digital Caliper IP67 Class



A




内置无线发射
Wireless data output

自动断电 Auto power-off 低电压报警 Low voltage alarm 分辨率:0.01mm Resolution:0.01mm



无内置发射
Without wireless data output

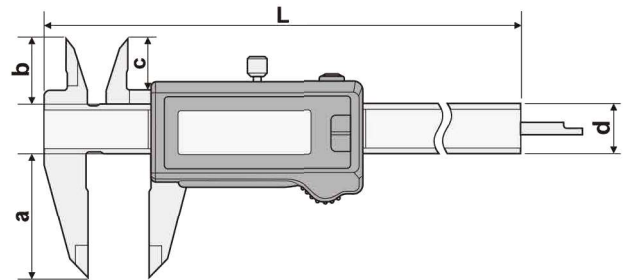


货号 Code NO. (无线发射型)	货号 Code NO.	测量范围 Measuring Range mm	精度 Accuracy mm	L mm	a mm	b mm	c mm	d mm
110-801-30E	110-801-30F	0-150	±0.03	236	40	21	16.5	16
110-802-30E	110-802-30F	0-200	±0.03	286	50	24	19.5	16
110-803-30E	110-803-30F	0-300	±0.04	400	60	26	21.5	16

主要特点:


- 防护等级达到IP67, 可以在冷却液、水、油中使用
- 带内置无线发射器系列的无线通信距离为10米(可视距离), 如果使用WIFI中继器, 通信距离可以达到120米
- 任意位置置零, 便于相对测量
- 任意位置公制与英制转换
- 自动断电, 拉动开机
- 大屏显示, 更方便读数
- 采用两码道定位, 芯片间歇工作, 电流较小, 电池寿命更长
- 内部稳压处理, 克服了其他品牌芯片对电池电压敏感问题
- 采用了混合定位算法, 没有其他品牌卡尺最大编码长度限制

FEATURES

- IP67 protection level to against coolant liquid, water, oil and dust
- Wireless data output to PC within 10 meters barrier free distance
By adding WIFI signal amplifier, the distance max to 120 meters
- Zero-setting at any position, easy for measurement
- Mm/inch conversion at any position
- Automatically power off, can power on by moving the slider
- Big display screen for easy to read
- Adapt two yards for positioning the chip works intermit, low electricity
- The internal voltage regulation overcomes the sensitivity of chips to the voltage
- Adapt a hybrid positioning algorithm, no maximum coding length constraints

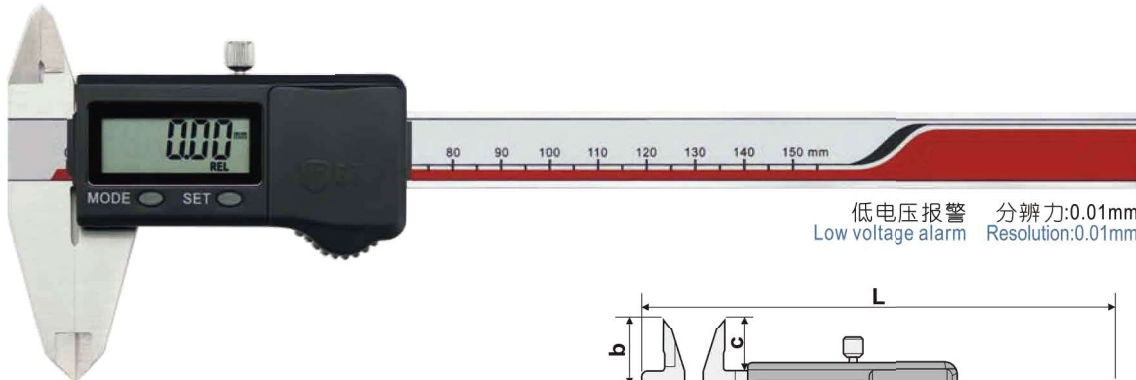

低电压报警 Low voltage alarm 分辨率:0.01mm Resolution:0.01mm

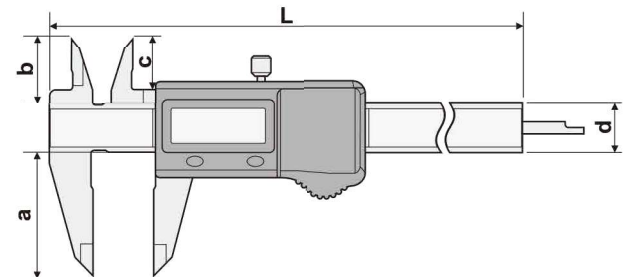

主要特点:

- 防护等级达到IP67, 可在冷却液、水、油中使用
- 任意位置清零, 便于相对测量与绝对测量转换
- 任意位置公制与英制转换

FEATURES

- IP67 protection level to against coolant liquid, water, oil and dust
- Zero-setting at any position, convenient for relative and absolute measure conversion
- Mm/inch conversion at any position

货号 Code NO.	测量范围 Measuring Range mm	精度 Accuracy mm	L mm	a mm	b mm	c mm	d mm
110-801-30A	0-150	±0.03	236	40	22.5	16.8	16
110-802-30A	0-200	±0.03	286	50	25.5	19.8	16
110-803-30A	0-300	±0.04	400	60	27	21.3	17