


双钩头数显深度尺

Digital Depth Gauge with Double Hooks

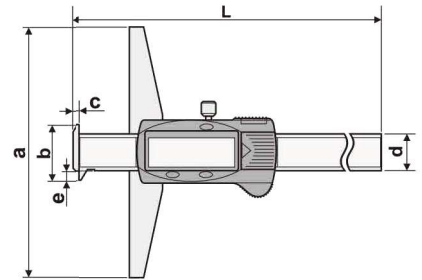

自动断电
Auto power-off
分辨率:0.01mm
Resolution:0.01mm

货号 Code NO.	测量范围 Measuring Range mm	精度 Accuracy mm	重量 Weight kg	L mm	a mm	b mm	c mm	d mm	e mm
123-131	0-150	±0.03	—	237.5	100	21.5	2.5	14.5	3.5
123-131-1	0-150	±0.03	—	237.5	150	21.5	2.5	14.5	3.5
123-132	0-200	±0.03	—	287.5	100	21.5	2.5	14.5	3.5
123-132-1	0-200	±0.03	—	287.5	150	21.5	2.5	14.5	3.5
123-133	0-300	±0.04	—	387.5	100	21.5	2.5	14.5	3.5
123-133-1	0-300	±0.04	—	387.5	150	21.5	2.5	14.5	3.5
123-135	0-500	±0.05	0.4	588	120	25	3	15	4
123-135-1	0-500	±0.05	0.4	588	150	25	3	15	4
123-135-2	0-500	±0.05	0.5	588	200	25	3	15	4
123-136	0-600	±0.05	0.5	688	120	25	3	15	4
123-136-1	0-600	±0.05	0.5	688	150	25	3	15	4
123-136-2	0-600	±0.05	0.6	688	200	25	3	15	4
123-137	0-800	±0.06	1.5	992	150	32	4	18	7
123-137-1	0-800	±0.06	1.6	992	200	32	4	18	7
123-137-2	0-800	±0.06	1.7	992	250	32	4	18	7
123-138	0-1000	±0.07	1.7	1192	150	32	4	18	7
123-138-1	0-1000	±0.07	1.8	1192	200	32	4	18	7
123-138-2	0-1000	±0.07	1.9	1192	250	32	4	18	7

主要特点:


- 用于精确测量孔深和台阶高度
- 任意位置清零，便于相对测量与绝对测量转换
- 任意位置公制与英制转换

FEATURES


- Used for depth and step measurements
- Zero-setting at any position, convenient for relative and absolute measure conversion
- Mm/inch conversion at any position

数显深度尺

Digital Depth Gauge

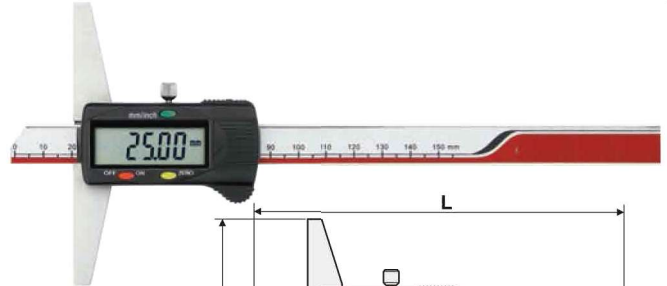

自动断电
Auto power-off
分辨率:0.01mm
Resolution:0.01mm

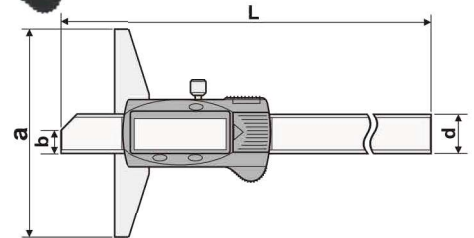

主要特点:

- 用于精确测量孔深和台阶高度
- 任意位置清零，便于相对测量与绝对测量转换
- 任意位置公制与英制转换

FEATURES

- Used for depth and step measurements
- Zero-setting at any position, convenient for relative and absolute measure conversion
- Mm/inch conversion at any position

货号 Code NO.	测量范围 Measuring Range mm	精度 Accuracy mm	L mm	a mm	b mm	d mm
121-201	0-150	±0.03	235	100	6	14.5
121-201-1	0-150	±0.03	235	150	6	14.5
121-202	0-200	±0.03	285	100	6	14.5
121-202-1	0-200	±0.03	285	150	6	14.5
121-203	0-250	±0.03	335	100	6	14.5
121-203-1	0-250	±0.03	335	150	6	14.5
121-204	0-300	±0.04	385	100	6	14.5
121-204-1	0-300	±0.04	385	150	6	14.5

货号 Code NO.	测量范围 Measuring Range mm	精度 Accuracy mm	重量 Weight kg	L mm	a mm	b mm	d mm
121-105	0-500	±0.05	0.4	585	120	7	15
121-105-1	0-500	±0.05	0.4	585	150	7	15
121-105-2	0-500	±0.05	0.5	585	200	7	15
121-106	0-600	±0.05	0.5	685	120	7	15
121-106-1	0-600	±0.05	0.5	685	150	7	15
121-106-2	0-600	±0.05	0.6	685	200	7	15
121-107	0-800	±0.06	1.5	988	150	7	18
121-107-1	0-800	±0.06	1.6	988	200	7	18
121-107-2	0-800	±0.06	1.7	988	250	7	18
121-108	0-1000	±0.07	1.7	1188	150	7	18
121-108-1	0-1000	±0.07	1.8	1188	200	7	18
121-108-2	0-1000	±0.07	1.9	1188	250	7	18
121-108-3	0-1000	±0.07	2.0	1188	300	7	18