

**大量程外径千分尺**

Long Range Outside Micrometer



数显型  
Digital type


**主要特点:**

- 精准的机械式结构，以使读数更直观方便
- 内置式限力装置，确保精确的重复读数
- 硬质合金测量面，保证设备持久的稳定性


**FEATURES**

- With mechanical structure, easy to read
- Built-in force limiting device ensures accuracy of repeat reading
- Cemented carbide measuring surface ensures the constant stabilization of the equipment


| 货号<br>Code NO. | 货号<br>(可调砧型)<br>Code NO. | 测量范围<br>Measuring Range<br>mm | 分度值<br>Graduation<br>mm | 精度<br>Accuracy<br>mm | 重量<br>Weight<br>kg | L<br>mm | a<br>mm | b<br>mm | c<br>mm | d<br>mm | e<br>mm |
|----------------|--------------------------|-------------------------------|-------------------------|----------------------|--------------------|---------|---------|---------|---------|---------|---------|
| 261-151        | 261-151A                 | 300-400                       | 0.01                    | 0.011                | 2.0                | 413     | 230     | 32      | 17      | 28      | Ø6.5    |
| 261-152        | 261-152A                 | 400-500                       | 0.01                    | 0.013                | 2.5                | 513     | 280     | 32      | 17      | 28      | Ø6.5    |
| 261-153        | 261-153A                 | 500-600                       | 0.01                    | 0.014                | 3.0                | 613     | 330     | 32      | 17      | 28      | Ø6.5    |
| 261-154        | 261-154A                 | 600-700                       | 0.01                    | 0.016                | 3.4                | 713     | 380     | 32      | 17      | 28      | Ø6.5    |
| 261-155        | 261-155A                 | 700-800                       | 0.01                    | 0.018                | 4.8                | 813     | 440     | 32      | 17      | 28      | Ø6.5    |
| 261-156        | 261-156A                 | 800-900                       | 0.01                    | 0.020                | 5.0                | 913     | 490     | 32      | 17      | 28      | Ø6.5    |
| 261-157        | 261-157A                 | 900-1000                      | 0.01                    | 0.020                | 6.0                | 1013    | 540     | 32      | 17      | 28      | Ø6.5    |
| 261-158        |                          | 1000-1200                     | 0.01                    | 0.020                | 6.8                | 1213    | 650     | 32      | 20      | 53      | Ø8      |
| 261-159        |                          | 1200-1400                     | 0.01                    | 0.024                | 8.3                | 1413    | 760     | 32      | 20      | 53      | Ø8      |
| 261-160        |                          | 1400-1600                     | 0.01                    | 0.028                | 9.2                | 1613    | 860     | 32      | 20      | 53      | Ø8      |
| 261-161        |                          | 1600-1800                     | 0.01                    | 0.031                | 11.4               | 1813    | 970     | 32      | 20      | 53      | Ø8      |
| 261-162        |                          | 1800-2000                     | 0.01                    | 0.034                | 14.4               | 2013    | 1060    | 32      | 20      | 53      | Ø8      |



测量范围小于1000mm系列  
Measuring Range below 1000mm



测量范围大于1000mm系列  
Measuring Range over 1000mm

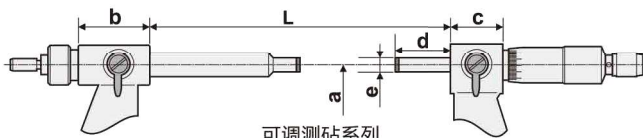



可调测砧系列

**数显型 Digital type**

| 货号<br>Code NO.<br>(可调砧型) | 货号<br>Code NO. | 测量范围<br>Measuring Range<br>mm | 分辨率<br>Resolution<br>mm | 精度<br>Accuracy<br>mm | 重量<br>Weight<br>kg | L<br>mm | a<br>mm | b<br>mm | c<br>mm | d<br>mm | e<br>mm |
|--------------------------|----------------|-------------------------------|-------------------------|----------------------|--------------------|---------|---------|---------|---------|---------|---------|
| 211-113EA                | 211-113EK      | 300-400                       | 0.001                   | 0.006                | 2.0                | 413     | 230     | 32      | 17      | 28      | Ø6.5    |
| 211-114EA                | 211-114EK      | 400-500                       | 0.001                   | 0.007                | 2.5                | 513     | 280     | 32      | 17      | 28      | Ø6.5    |
| 211-115EA                | 211-115EK      | 500-600                       | 0.001                   | 0.008                | 3.0                | 613     | 330     | 32      | 17      | 28      | Ø6.5    |
| 211-116EA                | 211-116EK      | 600-700                       | 0.001                   | 0.009                | 3.4                | 713     | 380     | 32      | 17      | 28      | Ø6.5    |
| 211-117EA                | 211-117EK      | 700-800                       | 0.001                   | 0.010                | 4.8                | 813     | 440     | 32      | 17      | 28      | Ø6.5    |
| 211-118EA                | 211-118EK      | 800-900                       | 0.001                   | 0.011                | 5.0                | 913     | 490     | 32      | 17      | 28      | Ø6.5    |
| 211-119EA                | 211-119EK      | 900-1000                      | 0.001                   | 0.012                | 6.0                | 1013    | 540     | 32      | 17      | 28      | Ø6.5    |

**管壁千分尺 (球头式)**

Tube Micrometer

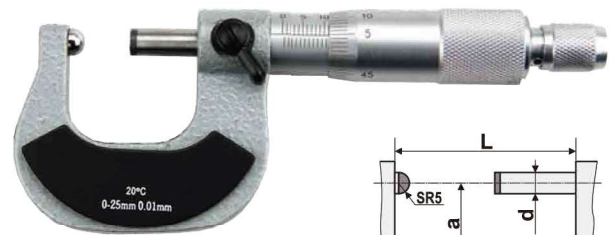

**主要特点:**

- 用于测量不同管材的厚度
- 测量头采用特种钢材制成，保证高精度及稳定性
- 内置式限力装置，确保精确的重复读数

**FEATURES**

- For measuring wall thickness of various types of tubing etc.
- Spindle made of special steel to ensure high precision and stability
- Built-in force limiting device ensures accuracy of repeat reading

| 货号<br>Code NO. | 测量范围<br>Measuring Range<br>mm | 分辨率<br>Resolution<br>mm | 精度<br>Accuracy<br>mm | L<br>mm | a<br>mm | d<br>mm |
|----------------|-------------------------------|-------------------------|----------------------|---------|---------|---------|
| 216-101        | 0-25                          | 0.001                   | 0.002                | 31      | 25      | Ø6.5    |
| 216-102        | 25-50                         | 0.001                   | 0.002                | 56      | 35      | Ø6.5    |
| 216-103        | 50-75                         | 0.001                   | 0.003                | 81      | 45      | Ø6.5    |
| 216-104        | 75-100                        | 0.001                   | 0.003                | 106     | 55      | Ø6.5    |

| 货号<br>Code NO. | 测量范围<br>Measuring Range<br>mm | 分度值<br>Graduation<br>mm | 精度<br>Accuracy<br>mm | L<br>mm | a<br>mm | d<br>mm |
|----------------|-------------------------------|-------------------------|----------------------|---------|---------|---------|
| 266-211        | 0-25                          | 0.01                    | 0.004                | 31      | 24      | Ø6.5    |
| 266-212        | 25-50                         | 0.01                    | 0.004                | 56      | 32      | Ø6.5    |
| 266-213        | 50-75                         | 0.01                    | 0.005                | 81      | 45      | Ø6.5    |
| 266-214        | 75-100                        | 0.01                    | 0.005                | 106     | 57      | Ø6.5    |