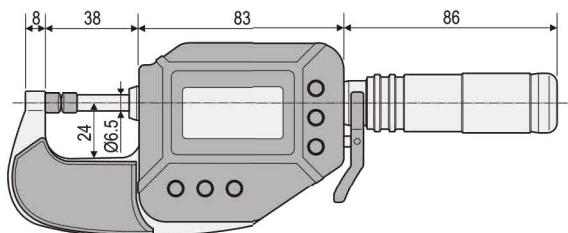


绝对原点数显杠杆千分尺

Absolute Digital Indicating Micrometer

**NEW**

货号 Code NO.	测量范围 Measuring Range mm	分辨率 Resolution mm	精度 Accuracy mm
211-901WH	0-25	0.001	0.001

主要特点:


- 采用绝对编码光栅位移传感器技术，无响应速度限制，且数据处理更快更稳
- 采用内置可充电锂电池，连续监测时可以外接充电器长时间工作
- 任意位置清零
- 公英制转换
- 记录连续测量过程中的最大值或最小值
- 记录连续测量的最大与最小值之差(Δ)，用于平面度和同轴度的测量
- 在测量过程中，根据设置的上下极限尺寸可自动判定工件是否合格
- 对工件进行分段测量，测量结束后可以将多段数据进行累加
- 以绝对原点方式测量。测量前预置一个基本尺寸，测量时读出来的数据是工件的实际尺寸，即实际尺寸 = 预置基本尺寸 + 偏差
- 测量的数据可通过数据采集系统进行数据传输

FEATURES

- Absolute coding grating displacement sensor technology, no limit for response speed, data processing is faster and more stable
- Build-in rechargeable lithium battery, external charger can be used for continuous monitoring
- Zero-setting at any position
- Mm/inch conversion at any position
- Hold the max or the minimum reading during measurement
- Tracing the balance between Max and Min value ($\Delta = \text{MAX-MIN}$)
- TOL Setting can check if the item is regular
- Segment measurement of workpiece, accumulate segment date after measurement
- Original setting without repeated zero-setting. Preset one basic size before measurement, and the data read out during measurement is the actual size of the workpiece, that is, the actual size = preset basic size + deviation
- Measuring value can be transmitted to PC

两点内测千分尺

Inside Micrometer

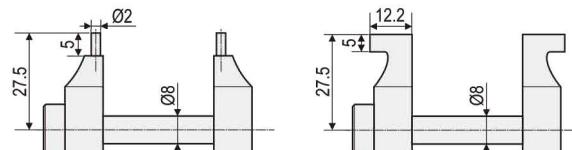**主要特点:**

- 适用于各种内尺寸测量
- 硬质合金量面

FEATURES

- Applied to all kinds of inside diameter measurements
- Carbide tips

货号 Code NO.	测量范围 Measuring Range mm	分度值 Graduation mm	精度 Accuracy mm
271-201	5-30	0.01	0.005
271-202	25-50	0.01	0.006
271-203	50-75	0.01	0.007
271-204	75-100	0.01	0.008