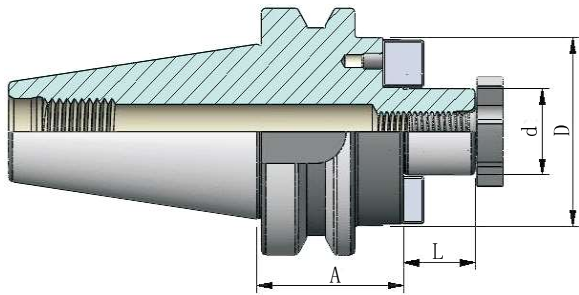




Shell Mill Toolholder / BT- 面铣刀柄



G6.3 8,000min<sup>-1</sup>

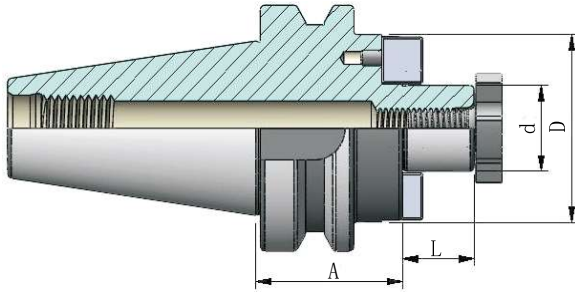
≤ 0.005

DIN 6357

BT-面铣刀柄

Order No. 货号	Size 规格	d 心轴直径	D 端面直径	Cooling 冷却方式	A 有效长度
31.4116.40	BT30-FMB16-40	16	38	AD	40
31.4122.40	BT30-FMB22-40	22	48	AD	40
31.4122.60	BT30-FMB22-60	22	40	AD	60
31.4127.45	BT30-FMB27-45	27	60	AD	45
31.4127.60	BT30-FMB27-60	27	48	AD	60
31.4132.60	BT30-FMB32-60	32	58	AD	60
41.4116.45	BT40-FMB16-45	16	32	AD	45
41.4122.55	BT40-FMB22-55	22	48	AD	55
41.4122.60	BT40-FMB22-60	22	40	AD	60
41.4127.40	BT40-FMB27-55	27	58	A	40
41.4132.50	BT40-FMB32-60	32	58	A	50
41.4140.50	BT40-FMB40-60	40	70	A	50
41.4116.100	BT40-FMB16-100	16	40	A	100
41.4122.100	BT40-FMB22-100	22	40	A	100
41.4127.100	BT40-FMB27-100	27	60	A	100
41.4132.100	BT40-FMB32-100	32	78	A	100
41.4140.100	BT40-FMB40-100	40	88	A	100
41.4122.150	BT40-FMB22-150	22	48	AD	150
41.4122.200	BT40-FMB22-200	22	48	AD	200
41.4127.150	BT40-FMB27-150	27	60	AD	150

Shell Mill Toolholder / BT- 面铣刀柄








G6.3 8000min<sup>-1</sup>

≤ 0.005

DIN 6357

BT-面铣刀柄

Order No. 货号	Size 规格	d 心轴直径	D 端面直径	L 心轴长度	Cooling 冷却方式	A 有效长度
51.4122.75	BT50-FMB22-75	22	40	19	A	75 
51.4122.100	BT50-FMB22-100	22	40	19	A	100 
51.4122.120	BT50-FMB22-120	22	40	19	A	120 
51.4127.60	BT50-FMB27-60	27	48	21	A	60 
51.4127.105	BT50-FMB27-105	27	48	21	A	105 
51.4132.60	BT50-FMB32-60	32	58	19	A	60 
51.4132.105	BT50-FMB32-105	32	58	24	A	105 
51.4140.60	BT50-FMB40-60	40	70	27	A	60 
51.4140.75	BT50-FMB40-75	40	70	27	A	75 
51.4150.70	BT50-FMB50-70	50	90	40	A	70 

应用范围: 用于夹持带径向驱动槽的铣刀  
相关配件: 压紧螺栓、扳手、拉钉

Use: For holding like shell mill cutters  
Accessories: rivet, wrench, stretching screw  
clutch drive rings

