


HSK-E Hydraulic Chuck / HSK - E - 液压刀柄

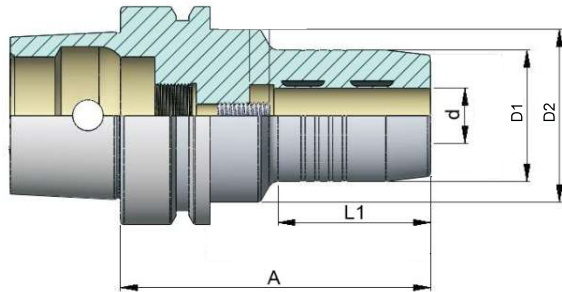

G2.5 25,000min<sup>-1</sup>

2.5Xd ≤ 0.005

HSK-E液压刀柄

Order No. 货号	Size 规格	d 夹持直径	D <sub>1</sub>	D <sub>2</sub>	L <sub>1</sub>	A 有效长度	
45.7006.70	HSK-E40-HC6-70	6	28	34	33	70	
45.7008.70	HSK-E40-HC8-70	8	30	34	34		
45.7010.75	HSK-E40-HC10-75	10	32	34	39	75	
45.7012.80	HSK-E40-HC12-80	12	34	34	—	80	
<hr/>							
55.7006.70	HSK-E50-HC6-70	6	30	42	25.5	70	
55.7008.70	HSK-E50-HC8-70	8	32	42	26		
55.7012.85	HSK-E50-HC12-85	12	36	42	40	85	
55.7016.90	HSK-E50-HC16-90	16	40	42	43	90	
55.7020.90	HSK-E50-HC20-90	20	42	42	—		
55.7020.120	HSK-E50-HC20-120	20	42	42	—	120	

\*同时有AD/B的冷却方式供选择，如货号为64.7010.150.1是AD的冷却方式  
货号为51.7010.150.2是AD/B的冷却方式

应用范围: 用于夹持圆柱柄DIN1835A+B+E型和DIN6535  
HA+HB+HE型(直径≥12mm时,可用减径套)  
被夹持刀具的柄部公差要达到h6  
相关配件: 液压减径套、冷却导管

Use: For mounting straight-shank tools acc  
DIN 1835 form A+B+E and DIN 6535 form  
HA+HB+HE (larger than dia. 12mm only  
with reduction sleeve)  
The Tolerance a of Tools Should be h6  
Accessories: reduction sleeves, coolant tubes

