




TOOL HOLDER / 刀柄 DIN 69893-5 (HSK-E)

HSK-E40 3° 热缩刀柄

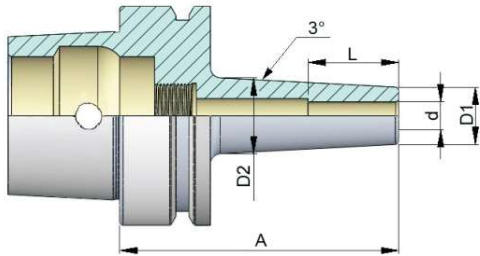

G2.5 40,000min⁻¹

4Xd ≤ 0.005

HSK-E50 3° 热缩刀柄

Order No. 货号	Size 规格	d 夹持直径	D1	D2	L	A 有效长度	
45.8103.60	HSK-E40-SF3-60	3	9	19	9	60	
45.8103.120	HSK-E40-SF3-120					120	
45.8104.60	HSK-E40-SF4-60	4	10	20	12	60	
45.8104.120	HSK-E40-SF4-120					120	
45.8105.60	HSK-E40-SF5-60	5	11	21	15	60	
45.8105.120	HSK-E40-SF5-120					120	
45.8106.80	HSK-E40-SF6-80	6	12	22	25	80	
45.8106.120	HSK-E40-SF6-120					120	
45.8108.80	HSK-E40-SF8-80	8	14	24		80	
45.8108.120	HSK-E40-SF8-120					120	
45.8110.80	HSK-E40-SF10-80	10	16	26	32	80	
45.8110.120	HSK-E40-SF10-120					120	
45.8112.90	HSK-E40-SF12-90	12	18	28	38	90	
45.8112.120	HSK-E40-SF12-120					120	
55.8104.70	HSK-E50-SF4-70	4	9	18.6	12	60	
55.8105.70	HSK-E50-SF5-70	5	10	19.6	15		

应用范围: 装夹迅速, 夹紧力大, 高速切削。
适用于夹持高速钢HSS和硬质合金圆柱柄刀具。
直径为Ø3, Ø4和Ø5的被夹持刀具的柄部公差要求达到h4, 直径为Ø6~Ø32的被夹持柄部公差要求达到h6

相关配件: 延长杆、冷却导管



Use: For mounting straight-shank tools
Note: Toolholders suitable for induction-, contact- and hot air shrink units.
Ø3, 4, 5 with h4-tolerance and Ø6-Ø32 with h6-tolerance

DIN 69893 (HSK)