


HSK-E50 3° 热缩刀柄

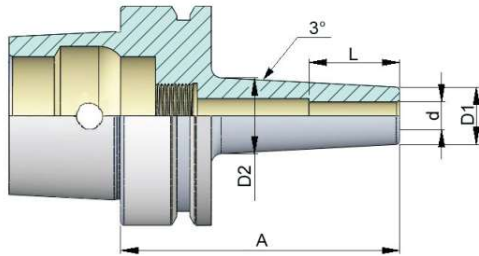

G2.5 40,000min⁻¹

↗ ≤ 0.003

HSK-E50 3° 热缩刀柄

DIN 69893 (HSK)

Order No. 货号	Size 规格	d 夹持直径	D1	D2	L	A 有效长度		
55.8106.70	HSK-E50-SF6-70	6	12	—	25	70		
55.8108.70	HSK-E50-SF8-70	8	12	21.6		70		
55.8108.120	HSK-E50-SF8-120					120		
55.8110.80	HSK-E50-SF10-80	10	14	23.6	32	80		
55.8110.120	HSK-E50-SF10-120					120		
55.8112.80	HSK-E50-SF12-80	12	16	25.6	38	80		
55.8112.120	HSK-E50-SF12-120					100		
55.8114.90	HSK-E50-SF14-90	14	18	27.6		90		
55.8114.120	HSK-E50-SF14-120					120		
55.8116.90	HSK-E50-SF16-90	16	20	29.6	40	90		
55.8116.120	HSK-E50-SF16-120					120		
55.8118.95	HSK-E50-SF18-95	18	22	31.6	42	95		
55.8118.120	HSK-E50-SF18-120					120		
55.8120.100	HSK-E50-SF20-100	20				44	100	
55.8120.120	HSK-E50-SF20-120						120	

应用范围: 装夹迅速, 夹紧力大, 高速切削。
 适用于夹持高速钢HSS和硬质合金圆柱柄刀具。
 直径为Ø3, Ø4和Ø5的被夹持刀具的柄部公差要求达到h4, 直径为Ø6~Ø32的被夹持柄部公差要求达到h6

Use: For mounting straight-shank tools
 Note: Toolholders suitable for induction-, contact- and hot air shrink units.
 Ø3,4,5 with h4-tolerance and Ø6-Ø32 with h6-tolerance

相关配件: 延长杆、冷却导管

