


HSK-A Combi Shell Mill Toolholder / HSK-A 混合式铣刀柄

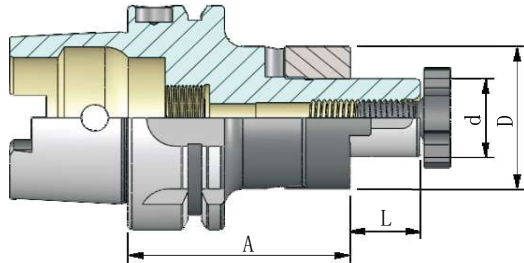

G6.3 15,000min⁻¹

↗ ≤ 0.005

HSKA-混合式铣刀柄

DIN 69893 (HSK)

Order No. 货号	Size 规格	d 心轴直径	D 端面直径	L 心轴长度	A 有效长度
54.4016.50	HSK-A50-CM16-50	16	32	17	50
54.4022.50	HSK-A50-CM22-50	22	40	19	50
54.4027.65	HSK-A50-CM27-65	27	48	21	65
54.4032.65	HSK-A50-CM32-65	32	58	24	65
64.4016.60	HSK-A63-CM16-60	16	32	17	60
64.4022.60	HSK-A63-CM22-60	22	40	19	60
64.4027.60	HSK-A63-CM27-60	27	48	21	60
64.4032.60	HSK-A63-CM32-60	32	58	24	60
64.4040.70	HSK-A63-CM40-70	40	70	27	70
104.4022.60	HSK-A100-CM22-60	22	40	19	60
104.4027.60	HSK-A100-CM27-60	27	48	21	60
104.4032.60	HSK-A100-CM32-60	32	58	24	60
104.4040.60	HSK-A100-CM40-60	40	70	27	60
104.4050.80	HSK-A100-CM50-80	50	90	30	80

应用范围: 适用于夹持带轴向或带径向驱动槽的铣刀
 如: 套式立铣刀, 面铣刀, 三面刃铣刀
 交货内容: 压紧螺栓 (经动平衡处理)
 相关配件: 压紧螺栓、扳手、驱动环、冷却导管

Use: For clamping shell mill DIN841 and DIN1880 as well as angular milling cutter DIN842 and cutter DIN1830

Delivery range: Locknut (balanced)
 Accessories: stretching screw, wrench, clutch drive rings, coolant tubes

