

Reduction Sleeves without Waterproof Ring/液压刀柄减径套(无中心通水)



Order No. 货号	Size 规格	d	D	L
3012.3003	RSH12-03	3	12	44.5
3012.3004	RSH12-04	4		
3012.3005	RSH12-05	5		
3012.3006	RSH12-06	6		
3012.3008	RSH12-08	8		
3020.3003	RSH20-03	3	20	50.5
3020.3004	RSH20-04	4		
3020.3005	RSH20-05	5		
3020.3006	RSH20-06	6		
3020.3008	RSH20-08	8		
3020.3010	RSH20-10	10		
3020.3011	RSH20-11	11		
3020.3012	RSH20-12	12		
3020.3013	RSH20-13	13		
3020.3014	RSH20-14	14		
3020.3016	RSH20-16	16		

应用范围: 用于夹持圆柱柄DIN1835A+B+E型和DIN6535 HA+HB+HE型(直径≥12mm时,可用减径套) 被夹持刀具的柄部公差要达到h6

Use: For mounting straight-shank tools acc DIN 1835 form A+B+E and DIN 6535 form HA+HB+HE(larger than dia.12mm only with reduction sleeve) The Tolerance a of Tools Should be h6

Reduction Sleeves without Waterproof Ring/液压刀柄减径套(无中心通水)



Order No. 货号	Size 规格	d	D	L
3032.3006	RSH32-06	6	32	60.5
3032.3008	RSH32-08	8		
3032.3010	RSH32-10	10		
3032.3012	RSH32-12	12		
3032.3014	RSH32-14	14		
3032.3016	RSH32-16	16		
3032.3018	RSH32-18	18		
3032.3020	RSH32-20	20		
3032.3025	RSH32-25	25		

应用范围: 用于夹持圆柱柄DIN1835A+B+E型和DIN6535
HA+HB+HE型(直径 ≥ 12 mm时,可用减径套)
被夹持刀具的柄部公差要达到h6

Use: For mounting straight-shank tools acc
DIN 1835 form A+B+E and DIN 6535 form
HA+HB+HE (larger than dia. 12mm only
with reduction sleeve)
The Tolerance a of Tools Should be h6

Reduction Sleeves with Waterproof Ring / 液压刀柄减径套(中心通水)




Order No. 货号	Size 规格	d	D	L
3012.4003	RSH12-03-IC	3	12	45
3012.4004	RSH12-04-IC	4		
3012.4005	RSH12-05-IC	5		
3012.4006	RSH12-06-IC	6		
3012.4007	RSH12-07-IC	7		
3012.4008	RSH12-08-IC	8		
3020.4003	RSH20-03-IC	3	20	50.5
3020.4004	RSH20-04-IC	4		
3020.4005	RSH20-05-IC	5		
3020.4006	RSH20-06-IC	6		
3020.4008	RSH20-08-IC	8		
3020.4009	RSH20-09-IC	9		
3020.4010	RSH20-10-IC	10		
3020.4011	RSH20-11-IC	11		
3020.4012	RSH20-12-IC	12		
3020.4016	RSH20-16-IC	16		

应用范围: 用于夹持圆柱柄DIN1835A+B+E型和DIN6535
HA+HB+HE型(直径≥12mm时,可用减径套)
被夹持刀具的柄部公差要达到h6

Use: For mounting straight-shank tools acc
DIN 1835 form A+B+E and DIN 6535 form
HA+HB+HE(larger than dia.12mm only
with reduction sleeve)
The Tolerance a of Tools Should be h6

Reduction Sleeves with Waterproof Ring/液压刀柄减径套(中心通水)

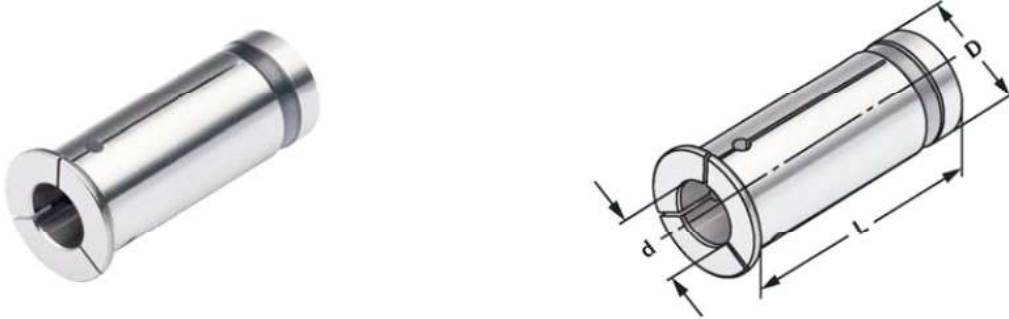

Order No. 货号	Size 规格	d	D	L
3032.4006	RSH32-06-IC	6	32	60.5
3032.4008	RSH32-08-IC	8		
3032.4010	RSH32-10-IC	10		
3032.4012	RSH32-12-IC	12		
3032.4016	RSH32-16-IC	16		
3032.4020	RSH32-20-IC	20		
3032.4025	RSH32-25-IC	25		

应用范围: 用于夹持圆柱柄DIN1835A+B+E型和DIN6535
HA+HB+HE型(直径 ≥ 12mm时,可用减径套)
被夹持刀具的柄部公差要达到h6

Use: For mounting straight-shank tools acc
DIN 1835 form A+B+E and DIN 6535 form
HA+HB+HE(larger than dia.12mm only
with reduction sleeve)
The Tolerance a of Tools Should be h6