
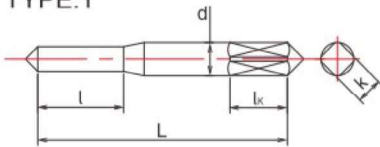





● for the cutting of materials: red copper, brass, zinc aluminium alloys, shapeable non ferrous Alloys medium and low carbon steels, alloys steels, Stainless Steel below a tensile strength of 750N/mm²

for cutting through hole / blind hold 


TYPE:1



TYPE: 2

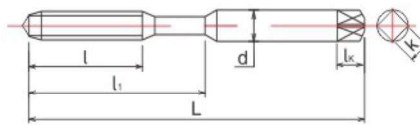

TYPE: 3

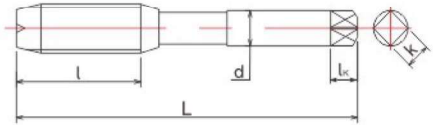

T509 Taps Series

产品编号(code)	美制牙(UNC)		精度	Size						Unit:mm	Net Price
	Size	Nominal Dia.		L	l	li	d	k	lk		
T509											
0000800	No.0-80UNF	1.524	H4	36	8		3.0	2.5	5	1	
00001720	No.1-72UNF	1.854	H4 H5	36	8		3.0	2.5	5	1	
00002560	No.2-56UNC	2.184	H4 H5	42	9.5	15	3.0	2.5	5	2	
00004400	No.4-40UNC	2.845	H5 H6 H7	44	9.5	16	3.0	2.5	5	2	
00005400	No.5-40UNC	3.175	H4 H5	46	11	18	4.0	3.2	6	2	
00006320	No.6-32UNC	3.505	H6 H7	48	13	20	4.0	3.2	6	2	
00008320	No.8-32UNC	4.166	H6 H7 H8	52	13	21	5.0	4.0	7	2	
00010240	No.10-24UNC	4.826	H6 H7	60	16	25	5.5	4.5	7	2	
00010320	No.10-32UNF	4.826	H6 H7	60	16	25	5.5	4.5	7	2	
00104200	1/4-20UNC	6.350	H6 H7 H8	62	19	30	6.0	4.5	7	3	
00104280	1/4-28UNF	6.350	H6 H7	62	19	30	6.0	4.5	7	3	
00516180	5/16-18UNC	7.938	H7 H8	70	22		6.1	5.0	8	3	
00516240	5/16-24UNF	7.938	H7 H8	70	22		6.1	5.0	8	3	
00308160	3/8-16UNC	9.525	H7 H8	75	24		7.0	5.5	8	3	
00308240	3/8-24UNF	9.525	H7 H8	75	24		7.0	5.5	8	3	