


内孔车刀(螺钉式) Boring Bars(S-type)


SCZCR/L

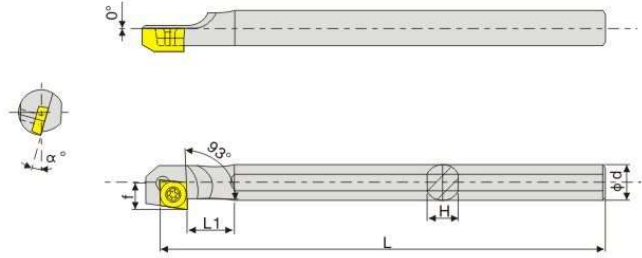

| 型号 Model | 刀片 Insert | 适用条件 Applicable conditions | | | | | | | 配件 Accessories | |
|----------------|---------------|-------------------------------|------|------|-----|----|----|-----|----------------|---------------|
| | | φ Dmin | φ D | f | L | L1 | H | α° | 螺丝 Screw | 扳手 Wrench |
| S08K-SCZCR/L06 | CC□□0602□□ | φ 12.5 | φ 8 | 6.5 | 125 | 25 | 7 | 13° | M2.5 × 6 | T8 |
| S10K-SCZCR/L06 | | φ 14 | φ 10 | 7.5 | 125 | 27 | 9 | 12° | | |
| S12M-SCZCR/L06 | | φ 16 | φ 12 | 8.5 | 150 | 30 | 11 | 10° | | |
| S16Q-SCZCR/L06 | | φ 20 | φ 16 | 10.5 | 180 | 35 | 15 | 8° | | |
| S20R-SCZCR/L09 | CC□□09T3□□ | φ 25 | φ 20 | 13.5 | 200 | 40 | 19 | 8° | M4 × 8 | T15 |
| S25S-SCZCR/L09 | | φ 32 | φ 25 | 16 | 250 | 42 | 24 | 6° | | |

内孔车刀(螺钉式) Boring Bars(S-type)

SDUCR/L

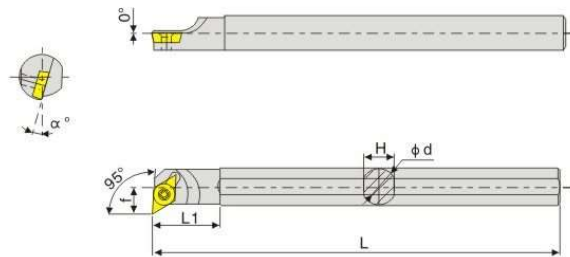

| 型号 Model | 刀片 Insert | 适用条件 Applicable conditions | | | | | | | 配件 Accessories | |
|----------------|---------------|-------------------------------|------|----|-----|----|----|-----|----------------|---------------|
| | | φ Dmin | φ D | f | L | L1 | H | α° | 螺丝 Screw | 扳手 Wrench |
| S10K-SDUCR/L07 | DC□□0702□□ | φ 15 | φ 10 | 8 | 125 | 25 | 9 | 10° | M2.5 × 6 | T8 |
| S12M-SDUCR/L07 | | φ 17 | φ 12 | 9 | 150 | 28 | 11 | 8° | | |
| S16Q-SDUCR/L07 | | φ 22 | φ 16 | 11 | 180 | 30 | 15 | 6° | | |
| S16Q-SDUCR/L11 | DC□□11T3□□ | φ 25 | φ 20 | 13 | 180 | 40 | 19 | 6° | M4 × 8 | T15 |
| S20R-SDUCR/L11 | | φ 32 | φ 25 | 16 | 200 | 40 | 24 | 4° | | |
| S25S-SDUCR/L11 | | φ 39 | φ 32 | 20 | 250 | 45 | 30 | 4° | | |
| S32T-SDUCR/L11 | | φ 50 | φ 40 | 24 | 300 | 50 | 38 | 2° | | |
| H10K-SDUCR/L07 | DC□□0702□□ | φ 15 | φ 10 | 8 | 125 | 25 | 9 | 10° | M2.5 × 6 | T8 |
| H12M-SDUCR/L07 | | φ 17 | φ 12 | 9 | 150 | 28 | 11 | 8° | | |
| H16Q-SDUCR/L07 | | φ 22 | φ 16 | 11 | 180 | 30 | 15 | 6° | | |