


■ CBR20, CBR30組合式外圓搪孔組件(搪孔範圍 $\phi 5\text{--}\phi 52\text{mm}$ )  
 CBR20, CBR30 combined cylindrical bore components (bore range is 5– 52mm)

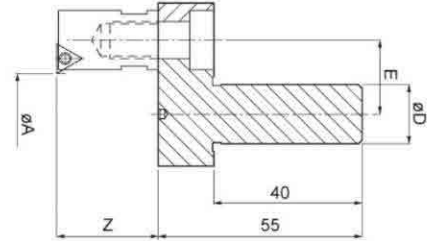

型號 Model	重量 weight	搪孔頭BE型 Boring head type BE	外圓搪孔範圍 $\phi A(\text{mm})$	偏心距離 $E(\text{mm})$	有效深度 $Z(\text{mm})$	柄徑 $\phi D(\text{mm})$	刀片規格 螺絲/板手	單價 RMB
C16-CBR20 C20-CBR20	0.16 0.195	BE36A	5-14	20	27	16/20	TPGH0802L T20040S T6F	600
		BE34A	7-16					
		BE32A	9-18					
		BE30A	11-20					
		BE28A	13-22					
		BE26A	15-24					
		BE24A	17-26					
		BE22A	19-28					
		BE20A	21-30					
		BE18A	23-32					
C16-CBR30 C20-CBR30	0.25 0.285	BE36A	25-34	30	27	16/20	TPGH0802L T20040S T6F	700
		BE34A	27-36					
		BE32A	29-38					
		BE30A	31-40					
		BE28A	33-42					
		BE26A	35-44					
		BE24A	37-46					
		BE22A	39-48					
		BE20A	41-50					
		BE18A	43-52					

※C16-CBR20, CBR30 為 CBR16 搪孔器轉用搪外圓組件

※C20-CBR20, CBR30 為 CBR2084 搪孔器專用搪外圓組件

C16-CBR20, CBR30 for CBR16 lining hole to lined cylindrical component

C20-CBR20, CBR30 CBR2084 for lining hole cylindrical component