


可换式合金暴力钻 Strong Drill with inserts

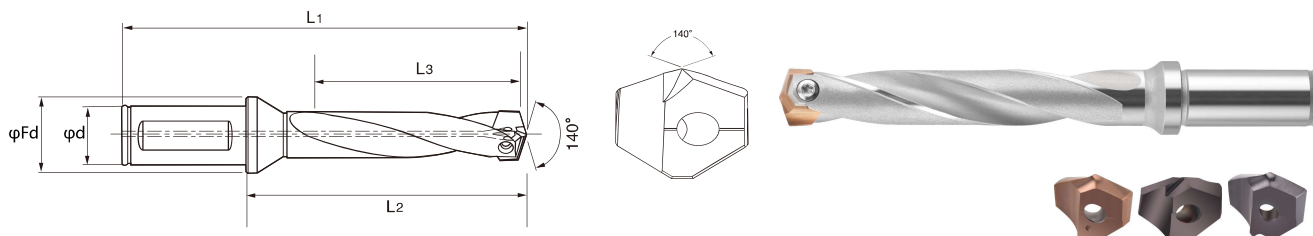


○ 不适合加工 ● 适合加工 ● 非常适合

		可换刀片式单尖钻头 内出水	P	M	K	N	S	H
H13	硬质合金		钢	不锈钢	铸铁	非铁材料	高温合金、钛合金	高硬度
			●	●	●	●	○	●

刀片直径范围	刀体型号	刀柄直径	切削深度	L1	L2	L3	法兰直径	螺丝型号	扳手型号				
φ19mm - φ19.9mm	HD-XD-F20-SD19	20	3D	138	88	57	25	M4.0 CS18.0-20.0SL	T15				
			5D	176	126	95							
			7D	214	164	133							
			10D	271	221	190							
φ20mm - φ20.9mm	HD-XD-F20-SD20	25	3D	146	90	60							
			5D	186	130	100							
			7D	226	170	140							
			10D	286	286	200							
φ21mm - φ21.9mm	HD-XD-F20-SD21	25	3D	149	93	63		34	M5.0 CS20.0-22.0SL	T20			
			5D	191	135	105							
			7D	233	177	147							
			10D	296	240	210							
φ22mm - φ22.9mm	HD-XD-F25-SD22	25	3D	153	97	66	41				M5.0 CS22.0-24.0SL	T25	
			5D	197	144	110							
			7D	241	188	154							
			10D	307	251	220							
φ23mm - φ23.9mm	HD-XD-F25-SD23	25	3D	156	100	69			41	M6.0 CS24.0-26.0SL			T25
			5D	202	146	115							
			7D	248	192	161							
			10D	317	261	230							
φ24mm - φ24.9mm	HD-XD-F25-SD24	32	3D	164	104	72		41			M6.0 CS26.0-28.0SL		
			5D	212	152	120							
			7D	261	200	168							
			10D	332	272	240							
φ25mm - φ25.9mm	HD-XD-F25-SD25	32	3D	166	106	75	41						
			5D	216	156	125							
			7D	266	206	175							
			10D	341	281	250							
φ26mm - φ26.9mm	HD-XD-F25-SD26	32	3D	169	109	78			41				
			5D	221	161	130							
			7D	273	213	182							
			10D	351	291	260							
φ27mm - φ27.9mm	HD-XD-F25-SD27	32	3D	173	113	81		41					
			5D	227	167	135							
			7D	281	221	189							
			10D	362	302	270							
φ28mm - φ28.9mm	HD-XD-F32-SD28	32	3D	178	118	84	41						
			5D	234	174	140							
			7D	290	230	196							
			10D	374	314	280							

可换式合金暴力钻 Strong Drill with inserts

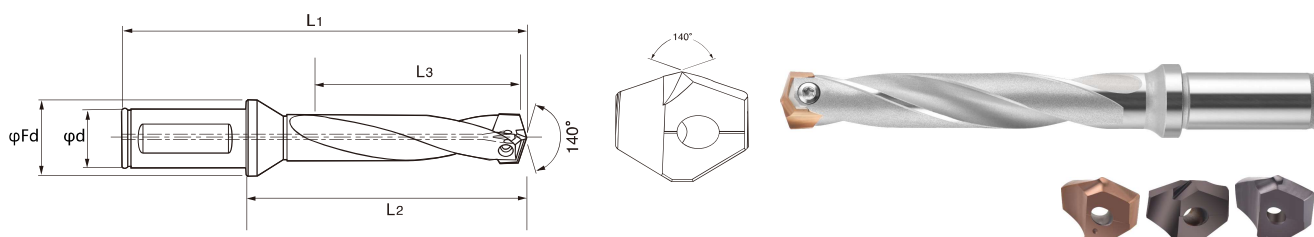

○ 不适合加工 ● 适合加工 ● 非常适合

		可换刀片式单尖钻头 内出水	P	M	K	N	S	H
H13	硬质合金		钢	不锈钢	铸铁	非铁材料	高温合金、钛合金	高硬度
			●	●	●	●	○	●

刀片直径范围	刀体型号	刀柄直径	切削深度	L1	L2	L3	法兰直径	螺丝型号	扳手型号							
φ29mm -φ29.9mm	HD-XD-F32-SD29	32	3D	182	122	87	41	M6.0 CS26.0-28.0SL	T25							
			5D	240	180	145										
			7D	298	238	203										
			10D	385	325	290										
φ30mm -φ30.9mm	HD-XD-F32-SD30		3D	186	126	90		41		M6.0 CS28.0-30.0SL	T25					
			5D	246	186	150										
			7D	306	247	210										
φ31mm -φ31.9mm	HD-XD-F32-SD31		3D	191	131	93						41	M6.0 CS28.0-30.0SL	T25		
			5D	253	193	155										
			7D	315	255	217										
φ32mm -φ32.9mm	HD-XD-F32-SD32		3D	195	135	96				41					M6.0 CS28.0-30.0SL	T25
			5D	259	199	160										
		7D	323	263	224											
φ33mm -φ33.9mm	HD-XD-F32-SD33	3D	200	140	99	49	M6.0 CS30.0-34.0SL		T25							
		5D	266	206	165											
		7D	332	272	231											
φ34mm -φ34.9mm	HD-XD-F40-SD34	3D	215	145	102			49			M6.0 CS30.0-34.0SL		T25			
		5D	283	213	170											
		7D	351	281	238											
φ35mm -φ35.9mm	HD-XD-F40-SD35	3D	218	148	105		49					M6.0 CS30.0-34.0SL		T25		
		5D	288	218	175											
		7D	358	288	245											
			10D	463	393					350						