


HSK-A100 3° Shrink / HSK-A100 3° 热缩刀柄

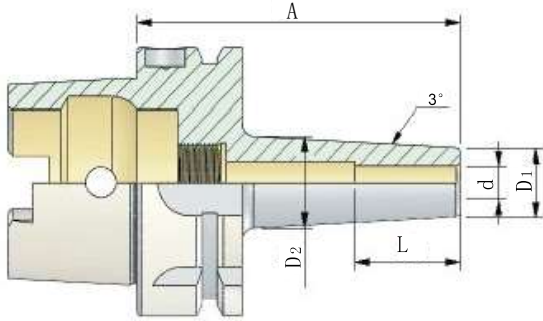

G2.5 25,000min<sup>-1</sup>

4Xd ≤ 0.005

HSK-A63 3° 热缩刀柄

Order No. 货号	Size 规格	d 夹持直径	D1	D2	L	A 有效长度
104.8118.100	HSK-A100-SF18-100	18	24	39.2	42	100
104.8118.130	HSK-A100-SF18-130					130
104.8120.105	HSK-A100-SF20-105	20	26		44	105
104.8120.130	HSK-A100-SF20-130					130
104.8125.115	HSK-A100-SF25-115	25	31		50	115
104.8125.130	HSK-A100-SF25-130					130
104.8132.120	HSK-A100-SF32-120	32	38			120
104.8132.150	HSK-A100-SF32-150					150

DIN 69893 (HSK)

应用范围: 装夹迅速, 夹紧力大, 高速切削。  
适用于夹持高速钢HSS和硬质合金圆柱柄刀具。  
直径为Ø3, Ø4和Ø5的被夹持刀具的柄部公差要求达到h4, 直径为Ø6~Ø32的被夹持柄部公差要求达到h6

相关配件: 延长杆、冷却导管

Use: For mounting straight-shank tools  
Note: Toolholders suitable for induction-, contact-and hot air shrink units.  
Ø3,4,5 with h4-tolerance and Ø6-Ø32 with h6-tolerance

Accessories: Extention Chuck

